

MICROstation6 – the compact POS system includes all important reloading and sales functions and provides various extensions for operation in restaurant and kiosk environments.



MICROstation6 immediate start-up and simple operation via the 4x4 key pad. Comfortable 4-line display for transactions, settings, statistics. Connection for printer and customer display available.

- Enter manual amounts to reload or to debit
- Mixed transactions reload and debit
- Manage products with fixed prices / VAT
- Full EVA-DTS statistics is stored and can be transferred with contactless Medium (RFID) or via handheld MDD6
- PIN Code protection

MICROstation6 Technical information

The following RFID technologies are supported

- MIFARE Mini
- MIFARE Classic
- MIFARE Plus EV1 1K
- MIFARE Plus
- MIFARE DESFire
- MIFARE DESFire EV1/EV2

Functions

User Transactions

- Reload a payment medium (+)
- Debit a payment medium (-)
- Clear the balance of a payment medium (CLR)
- Print consumer receipt automatically when payment medium is removed and if printer is connected
- All transactions (reload + debits) are cumulated / visible on receipt


System Setup

- Enter system programming and modify settings (.)
- PIN for „Administrator“
- PIN for „Operator“
- Enable / lock functions for operator
- Reset statistics
- Header / Footer for receipt printing
- Language settings (EN, DE, FR)

Msmart6 Reader Features

- EVA-DTS statistics in internal memory (incremental stats / running totals)
- Transfer EVA-DTS statistics via RFID (U-KEY STATISTIC G6)
- Detailed transactions (G6 internal protocols)
- Transfer transactions via MDD6 handheld device

4-Line Display

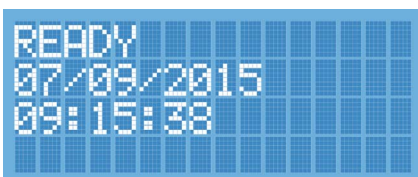


- Login
- System settings
- Ready for use
- Reload
- Debit amount
- Clear the balance
- Display / clear statistics
- Error codes

Specifications

Dimensions	W 200 x D 150 mm H 63mm
Material	Plastic housing ABS
Weight	0,6 kg
Power supply	wall power supply
	Input: 230 VAC/50 Hz
	Output: 6 W / 500mA
Reader typ	Msmart6
Certification	CE/RoHS/WEEE

- Back side:
- 1 Power supply
 - 2 ON/OFF switch
 - 3 Printer connection RS232
 - 4 MDS connection RS232/RJ45
MDD6 configuration/statistics

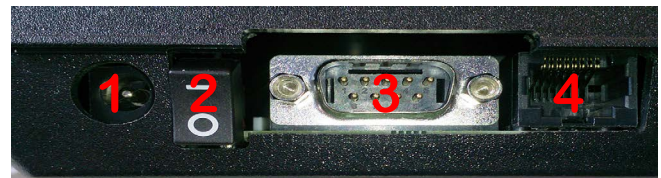

Options

Printer

- EPSON TM 88



Customer display

- EPSON DM-D110

