

La clé vente test peut se faire avec une clé utilisateur standard.

Pour se faire:

- ERASE
- En tête de badge>Fonction>Service
- WRITE
- Add Block (menu déroulant du haut)
- Service
- Dans le bloc Service>Fonction>Vente test
- Saisir le code site et la plage
- WRITE

Dans la programmation du lecteur, il peut y avoir deux possibilités (onglet DA; partie vente test):

- 1) Vente test: Toujours activé
Il n'y a pas besoin de presser le bouton test pour activé la clé.
- 2) Vente test: Timeout
La vente test est activé en pressant le bouton test pendant 4sec (4bips). La vente test est permis durant 180sec après cela tout redeviens par défaut.

Service U-KEYs

Test Vend

Header Function = Service / Add block = Service G6 / Block function = Test vend

MDSedit! v6.10.0.1088 (131) [TML6 Full] PC90(hg) Win 7

Snap Print Write Norm Sort Dump Full Copy Erase Setup

Formaté 15.11.13 1+42 blocs Identificateur non unique (NUID) 537D6751 (08238929)

En-tête badge

Fonction	Attributs	Code pays	Données pays	Revendeur	N° Utilisateur
Service	-	200	0	1	108

Service 2/1 Vente test

Service G6

Blocage	Lecture	Code site	Fonction
☐	☐	65500	1 Vente test

Rangs CA

Rangs	Attributs	De CS	À CS
Rangs 0	-	65500	0
Rangs 1	-	0	0
Rangs 2	-	0	0

MIC-HG 000016 M-Protocol R01.05.00-5642 (131)

One or several ranges of company codes can be assigned.

The reader only accepts this system U-KEY, if the reader configuration is set up properly. The function **Test Vend** must be enabled with one of the two options in tab **Vending**:

Option1: System U-KEY „**Test Vend**“ is always accepted



If Test Vend function is not activated in the reader, the following message is displayed:



yellow LED is flashing

Option2: System U-KEY **Test Vend** is only accepted after clicking on TEST button




If TEST button has not been pressed, the following message is displayed:



yellow LED is flashing

Activate Test Vend with the TEST button on the reader according the following sequence:

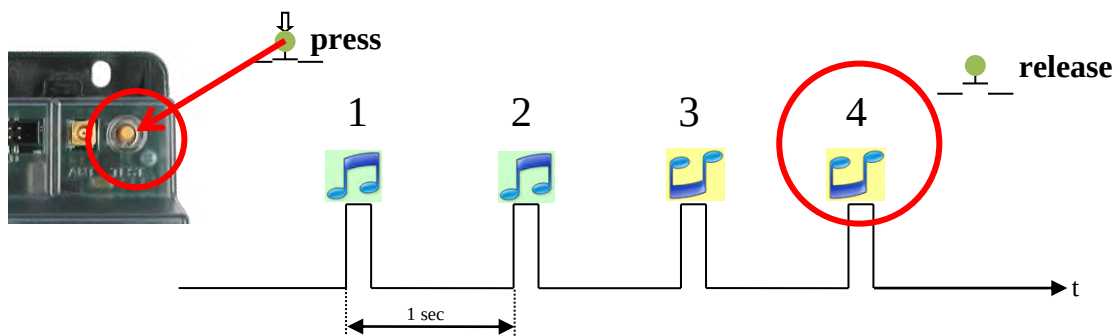

If Test Vend is activated with TEST button, test vends are allowed for 3 minutes:



green LED is solid with alarm signal